

09/22/00
JC928 U.S. PTO

09-25-00

A

JC928 U.S. PTO
09/667284

09/22/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION SERIAL NO. Unknown
FILING DATE Filed Herewith
INVENTORS Thomas D. Dickson, Jr. et al.
GROUP ART UNIT Unknown
EXAMINER Unknown
ATTORNEY'S DOCKET NO. 8132
TITLE "Blending Station Apparatus and Method"

TRANSMITTAL LETTER AND CERTIFICATE OF EXPRESS MAILING

To: Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231


From: L. Grant Foster
FOSTER & FOSTER L.L.C.
602 East 300 South
Salt Lake City, UT 84102
Telephone: (801) 364-5633
Facsimile: (801) 355-8938

Enclosed are the items listed below submitted regarding the matter identified above:

1. Transmittal Letter with Certificate of Express Mailing included
2. PTO Return Postcard Receipt
3. Patent Application (31 pages, including Specification, 40 Claims, Abstract and 10 sheets of drawings (Figs. 1-13))
4. Power of Attorney/Declaration (unsigned)
5. Small Entity Statement (unsigned)
6. Fee Calculation Sheet (in duplicate)

Deposit Account Authorization - The Commissioner is hereby authorized to charge payment of any applicable fees to Deposit Account No. 06-1620.

Date: 22 September 2000

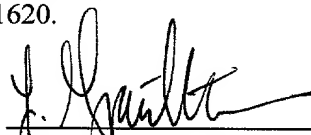By: 
L. Grant Foster
Reg. No. 33,236

CERTIFICATE OF MAILING

I hereby certify the items listed above as enclosed are being deposited with the U.S. Postal Service as either first class mail or Express Mail, if the blank for Express Mail No. is completed below, in an envelope addressed to Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231, on the below indicated date. Any Express Mail No. has also been marked on the listed items.

Express Mail No. EL559554119US

Date: 22 September 2000

Signature: 
Name: Kathy Case

jc862 U.S. PRO
09/667284
09/22/00

APPLICANT'S CALCULATION OF TOTAL FEES DUE							
FEE TYPES							Amount (\$)
BASIC FEE (\$690/345)							\$ 345.00
CLAIMS FEES	Number of Claims Remaining After Any Amendments	Minus the Larger		Equals	Times Rate (\$)		
		Number Allowed in Base Fee	Number of Claims For Which Fees Have Been Paid	Excess Claims For Which Fees Are Now Due	Large Entity	Small Entity	
Total Claims	40	20		20	18.00	9.00	180.00
Indep. Claims	5	3		2	78.00	39.00	78.00
EXTENSION PETITION/FEES (\$) Applicant hereby petitions for an extension of time for response under 37 CFR 1.136(a) as indicated or as necessary to maintain the pendency of this application.				One month	110.00	55.00	
				Two months	380.00	190.00	
				Three months	870.00	435.00	
				Four months	1,360.00	680.00	
				Five months	1,850.00	925.00	
ANY OTHER FEES							
TOTAL FEES OWED							\$ 603.00

Deposit Account Authorization - The Commissioner is hereby authorized to charge payment of the \$603.00 government fee, and to charge any necessary payments or credit any applicable fees to Deposit Account No. 06-1620.

A duplicate copy of this form is enclosed.

Date: 22 SEPTEMBER 2000

By: [Signature]
L. Grant Foster
Registration No. 33,236

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION SERIAL NO. Unknown
FILING DATE Filed Herewith
INVENTORS Thomas D. Dickson, Jr. et al.
ASSIGNEE K-TEC, Inc.
ATTORNEY'S DOCKET NO. 8132
TITLE "Blending Station Apparatus and Method"

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) and 1.27(c)) - SMALL BUSINESS CONCERN**

I hereby declare that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN: K-TEC, Inc.

ADDRESS OF CONCERN: 1206 South 1680 West
Orem, Utah 84058

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled "Blending Station Apparatus" by inventors Thomas D. Dickson, Jr., B. Shawn Elgaaen, Ralph W. Schwarze, and David J. Throckmorton, described in the patent application filed herewith.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventors, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e). *Note: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

NAME:
ADDRESS:

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name : Thomas D. Dickson, Jr.
Title: President
Address: 10439 N. Edinburgh Drive
Highland, Utah 84003

Signature: _____ Date: _____

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

BLENDING STATION APPARATUS AND METHOD

INVENTORS:

**Thomas D. Dickson, Jr.
B. Shawn Elgaaen
Ralph W. Schwarze
David J. Throckmorton**

PREPARED BY:

**FOSTER & FOSTER L.L.C.
602 EAST 300 SOUTH
SALT LAKE CITY, UTAH 84102**

ATTORNEY'S DOCKET NO. 8132

TECHNICAL FIELD

This invention relates to machines and methods for processing foodstuffs, and more particularly to blending machines, blending stations, and blending methods used to prepare beverages for consumption by the purchasing public.

BACKGROUND OF THE INVENTION

The popularity of food processors or blending machines, particularly in the beverage industry, has soared in recent times. People are beginning to appreciate the taste and quality of a well-processed beverage. Blended fruit smoothies and similar fruit drinks, popular with all types of people ranging from fitness fanatics to the less active, require a food processor or blending machine. Cold beverages, in particular, which utilize fruit (frozen or fresh) and ice to prepare present unique challenges in beverage preparation. An appropriate blending machine will break down the ice, fruit, and other ingredients in attempting to achieve an ideal uniform drink consistency. In addition, food processors or blending machines are ideal for mixing nutritional supplements into beverages while similarly attempting to achieve an ideal uniform drink consistency.

In addition to the smoothie craze which has swept the nation, food processors and blending machines are being used to produce many new and different beverages. For example, different types of coffees, shakes, dairy drinks, and the like are now commonly served at many different types of retail business locations. Consumers are demanding more diversity and variety in the beverages available at these smoothie shops and other retail stores. The keys to producing a high quality beverage, irrespective of the specific type of beverage, are quality ingredients and a high

quality blending machine that will quickly and efficiently blend the ingredients to produce a drink with uniform consistency.

One problem associated with businesses that depend on blending machines is the speed with which the beverage or drink is prepared. In the food preparation industry, time equals money. Traditional beverages are made by retrieving a clean blending container, adding nutritional supplements, adding liquid ingredients (*e.g.*, juices and water), adding fruit, adding ice cream, sorbet, sherbet, yogurt, or another similar ingredient, and adding ice. Thereafter, the blending container is covered and placed upon a motor which rotates a blade rotatably and integrally mounted within the blending container to process the foodstuffs and ingredients in an attempt to achieve the desired uniform drink consistency. Thereafter, the blending container is removed from the motor, the lid is removed from the top of the blending container, and the worker pours a blended beverage from the blending container into a beverage receptacle. Where an enclosure is used for noise reduction purposes, the blending container and installed lid must first be removed from the enclosure before removing the lid and serving the beverage. As noted, traditional blending methods require many separate steps and are highly cumbersome. Traditional blending requires physically moving the blending container to different locations for adding the various ingredients to the blending container, and then to the processing area. Collectively, significant periods of time are wasted between stations and by the requirement of human interaction. If the retail store is busy, the worker may leave the blending container at a particular location for an extended period of time. All of these non-automated steps performed by the beverage preparer, consume collectively large amounts of time. Each second wasted translates over time into money lost.

Another problem associated with traditional food processors and blenders relates to cleaning the blending container after a beverage for public consumption has been prepared. Traditionally, the blending containers are moved into a cleaning area for ultimate cleaning by hand and later transferred to an area where the blending container, after hand cleaning, can be used to mix another drink. It is generally understood that leaving unclean food service equipment in ambient air for even short periods of time may result in the formation of bacteria. Where washing by hand is employed (as opposed to automatic machine washing at relatively higher water temperatures), delay in cleaning may create problems. In addition, as mentioned above, steps such as washing by hand take time. The location where the blending containers are cleaned is usually remote from the location where the beverages are poured into receptacles for providing to customers. Thus, time is required to manually move the blending container from the service area to the remote cleaning area, which again becomes significant over a period of time.

Still another problem associated with traditional mixing devices relates to the need for multiple workers to be positioned at the various locations required in traditional mixing. It is common to have multiple workers at multiple stations where multiple blending containers are shuttled between stations while drinks are being prepared. For obvious reasons, the manpower requirements associated with traditional commercial drink mixing is expensive.

Yet another problem associated with making traditional frozen desserts, soft-serve ice cream, milkshakes, and the like, is that the products sit for extended periods of time in convenience stores and other fast-serve retail locations and are not blended or mixed at the time the products are served. Accordingly, these products cannot maintain consistency with respect to the composition of the beverage or with respect to the flavor of the beverage. Prior machines for producing frozen desserts such as soft-serve ice cream, milkshakes, icees, and the like, typically

work on the principle of providing a drum within the machine that is chilled. A diluted beverage mixture freezes to the drum and is scraped off in the mixing process. As the mixed beverage materials sit for extended periods of time, they tend to separate, further crystalize, and degenerate with respect to taste and composition consistency.

A further problem associated with traditional machines that serve chilled or partially frozen beverages, including without limitation soft-serve ice cream, shakes, icees, etc., is that the beverage mix typically comes in the form of a diluted beverage mixture. All of the water, concentrate, and other ingredients must be shipped together. This requires shipping, storing, and installing for service to customers through a machine additional quantities (in terms of volume and weight) of the diluted beverage mixture.

In view of the foregoing, there is a need to provide a blending station apparatus and method of blending that will allow beverages to be made quickly and efficiently minimizing the overall time required between ordering a beverage and serving the beverage to the customer. There is also a need to provide a blending station apparatus and blending method that will minimize human involvement during the preparation and blending process. There is a further need to provide a blending station apparatus where ice and the other beverage ingredients can be mixed immediately prior to serving a beverage for consumption to maintain the highest possible quality of flavor and drink consistency.

SUMMARY AND OBJECTS OF THE INVENTION

It is a primary object of the invention to provide an improved blending station apparatus that requires less time to prepare the beverage from the time it is ordered.

Another object of the present invention is to provide a method of blending a beverage that allows ice and the various beverage ingredients to be blended at the time the beverage is ordered to produce a beverage with an improved taste and texture consistency.

Another object of the present invention is to provide a self-contained blending station apparatus where all beverage preparation and processing steps take place.

Another object of the invention is to provide a single-location blending station that includes a plurality of foodstuffs storage compartments, a mixing location, and a cleaning location for cleaning a blending container used to prepare the beverage.

Still another object of the present invention is to provide a method of preparing a beverage at a single blending location where the necessary ice, water, and plurality of foodstuffs for beverage diversity are maintained, where the blending takes place, and where cleaning of the blending container takes place.

Yet another object of the invention is to provide a beverage blending station apparatus where all constituents necessary to produce a beverage are appropriately stored and provided automatically, when called upon, to produce a beverage at a single location.

Another object of the invention is to provide a blending station apparatus that provides a plurality of storage containers for different foodstuffs, each of which can be selected for automatic dispensing into a blending container to create many different flavors of beverages.

Another object of the present invention is to provide a blending station apparatus where water, ice, and a plurality of beverage flavors are added to a blending container automatically without moving the blending container to different locations.

Another object of the present invention is to provide a blending station apparatus where all preparation and processing steps may be achieved by one person at a single mixing location.

Yet another object of the invention is to provide a blending station apparatus that minimizes human involvement.

Another object of the present invention is to provide a blending station apparatus where a plurality of foodstuffs supply sources are provided, which can be used individually or in any combination, at a single blending location.

Still another object of the present invention is to provide a blending station apparatus where all automated preparation, blending, and cleaning devices are incorporated into a single blending station apparatus.

Yet another object of the present invention is to provide a blending station apparatus where ice and any necessary water is mixed at the point-of-service of the beverage to allow for improved consistency with respect to taste and composition of the beverage.

Another object of the invention is to provide a blending station apparatus that senses the temperature of the water being added to the foodstuffs so that ice can be portioned according to the temperature of the water to achieve a desired mix of ice, water, and foodstuffs.

Still another object of the invention is to provide a blending station apparatus that may be operatively coupled to a cash register or other location where an order is taken so that the process of preparing a beverage can be initiated immediately upon inputting information into the cash register or other ordering machine to speed up the beverage preparation process.

The foregoing objects are achieved by a blending station apparatus and method according to the present invention. The blending station preferably comprises generally a foodstuffs storage location where a plurality of individual foodstuffs storage containers are held, a control panel for inputting information into the blending station so that the beverage size and one or more of the various types of foodstuffs, as well as other ingredients such as ice, water, supplements, etc., can

be selected to make a drink, a blending container to hold the various ingredients, a mixing location for blending the ingredients to achieve a uniform drink consistency, and a cleaning location to clean the blending container after the blended contents have been dispensed into a container for consumption. With size and space being the only limiting factor, the blending station may contain as many storage compartments for different foodstuffs storage containers as desired. In one preferred embodiment, six different storage compartments are utilized. By automatically blending the ice and other beverage ingredients just prior to serving the beverage, the blending station apparatus allows for rapid production of beverages with an improved taste and composition consistency. Another benefit of the present invention is that the foodstuffs can be shipped as a concentrate where ice and any necessary water can be blended into the beverage at the serving location, as compared to the traditional diluted beverage mixture which is heavier and takes up more space.

Other objects, features, and advantages of the invention will become apparent from the following detailed description of the invention with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention are described below with reference to the accompanying drawings:

Fig. 1 is a partial perspective view of a blending station apparatus according to the present invention;

Fig. 2 is an enlarged partial right side elevation view, partly in section, of the ice hopper and ice auger assemblies utilized in connection with the blending station apparatus according to the present invention;

Fig. 3 is an enlarged top view of an alternative embodiment of the ice hopper and ice auger assemblies utilized in connection with the blending station apparatus according to the present invention;

Fig. 4 is a partial front elevation view of a blending station apparatus according to the present invention;

Fig. 5 is an enlarged exploded perspective view of a peristaltic pump utilized in connection with the blending station apparatus according to the present invention;

Fig. 6 is an enlarged partial perspective view of a peristaltic pump and associated foodstuffs storage container, partly in section, utilized in connection with the blending station apparatus according to the present invention;

Fig. 7 is a perspective view of the drive gears for the various peristaltic pumps (not shown in Fig. 7) and the main jack shaft used to rotate all of the pump drive gears;

Fig. 8 is a partial right side elevation view of the drive mechanisms utilized in connection with the blending station apparatus according to the present invention;

Fig. 9 is a perspective view of an array of foodstuffs supply tubes, the processing location, and the cleaning location utilized in connection with the blending station apparatus according to the present invention;

Fig. 10 is a perspective view of a recirculating refrigeration system duct for the foodstuffs supply tube array utilized in connection with the blending station apparatus according to the present invention; and

Fig. 11 is a front view of the recirculating refrigeration system of Fig. 10;

Fig. 12 is a right side elevation view of the recirculating refrigeration system duct of Fig. 10; and

Fig. 13 is a rear view of the recirculating refrigeration system duct of Fig. 10.

DETAILED DESCRIPTION OF THE INVENTION

As shown in Fig. 1, the present invention relates to a blending station apparatus 20 which comprises generally an ice hopper area 22, a processing area 24, a beverage blending container or jar 25, a cleaning area 26, and a foodstuffs storage area 28. The blending station apparatus 20 is designed to provide all necessary ingredients (*e.g.*, ice, water, and foodstuffs), equipment, and items necessary to prepare beverages, drinks, and the like at a single preparation and processing location. The term “beverage,” for purposes of this disclosure, means any type of liquid foodstuffs, such as without limitation soft-serve foodstuffs, partially frozen foodstuffs, or other types of foodstuffs liquid. The term “foodstuffs,” for purposes of this disclosure, means any type of ingredient or other materials added to the beverage mixture prior to blending except for ice and water.

The benefits of a blending station apparatus which is completely self contained are many. Time to prepare a beverage is reduced, human involvement is minimized, and the entire unit takes up relatively little spaced in a commercial facility, particularly as compared to traditional blending locations and methods. Additionally, frozen beverages, such as blended fruit smoothies, can be produced immediately after being ordered so the ice and other beverage ingredients are combined and blended together just before serving to produce a beverage with an improved taste and composition consistency.

It should be noted that Fig. 1 shows the blending station apparatus 20 without the typical side walls, doors, and covers that are utilized in connection with a preferred embodiment of the present invention. For example, a lid is preferably used to cover the ice storage or hopper area 22.

A hinged door is preferably used to enclose the jar 25 within the processing area 24 for safety and other reasons. In fact, automatic processing may take place upon closing the door, as disclosed and claimed in U.S. Patent No. 5,957,577, which is incorporated by this reference in its entirety. An insulated, hinged cabinet door is preferably used to cover foodstuffs storage area 20. Appropriate side walls are used on the front, sides, and back of the blending station apparatus. For improved aesthetics, the present invention is shown in the drawing without these conventional side walls, doors, etc., to facilitate explanation of the various aspects of the blending station apparatus and method.

The ice hopper area 22 more specifically comprises an ice hopper 30 sized to hold a sufficient amount of ice to run the blending station apparatus for a sustained period of time. In one embodiment, the ice hopper is capable of holding approximately 100 pounds of ice. The ice hopper 30 could be constructed so as to be associated with an automatic ice making machine (not shown). Alternatively, the ice hopper 30 may be filled manually on an as-needed basis. The ice hopper comprises inclined upper side walls 32 which funnel the ice toward the auger assembly 34.

With reference to Fig. 2, the auger assembly 34 more specifically comprises a coil 36 coupled to an auger shaft 38 which is rotatably mounted, in turn, to one end of the hopper 30. An auger sprocket 40 is secured to the shaft 38 such that when a drive mechanism (not shown in Fig. 2), is operatively coupled to auger gear 40, the auger rotates to move the ice in a flow direction FD toward an ice chipper assembly 42, as shown in Fig. 2.

The ice chipper or crusher assembly 42 more specifically comprises an ice chipper head 44 which is coupled to an ice chipper shaft 46 which is rotatably secured to the ice hopper at mounting locations 48, 50. The chipper head 44 is rotatably mounted within a cylindrical ice chipper housing 47. The ice chipper shaft 46 is mounted for relative rotation within the auger

shaft 38, and is driven by a chipper sprocket 52 secured to an end of the shaft 46 at an end opposite the chipper assembly 44.

Referring still to Fig. 2, the ice chipper head 44 of the ice chipper assembly 42 comprises a plurality of blades or paddles 54 having a plurality of edges 56. Preferably, the chipper head 44 comprises four (4) paddles. The paddles 54 and respective edges 56 push ice against a stationary blade 58 to reduce the ice, by crushing or chipping, to a desired size to facilitate precise portioning of the ice for blending purposes. A shroud 57 extends partially over the auger assembly 34 and channels the ice to be chipped toward the chipping head 44 at a constant rate. The resulting chipped or crushed ice passes through exit aperture 60 which extends directly above the blending container 25 (Fig. 1) for adding ice to the beverage being made. The ice chipper and auger operation is time controlled, depending on the size of the beverage being ordered.

As will be apparent given the size differences between the auger sprocket 40 and the ice chipper sprocket 52, which are driven by the same motor, the auger assembly 34 will rotate at a different speed as compared to the chipper assembly 42. For this reason, the ice chipper shaft 46 is rotatably mounted inside of the auger shaft 38 for relative rotation between the two shafts. The specific speeds may be adjusted by changing the diameter of the sprockets and can be set according to the desires of a person of ordinary skill in the art.

An alternative embodiment of an ice hopper assembly 70 is shown in Fig. 3. The ice hopper assembly of this embodiment includes a first auger assembly 72, a second auger assembly 74, and a third auger assembly 76. Each auger assembly moves the ice within the hopper 70. As will be noted, the auger assemblies are oriented sequentially opposite one another. That is, auger assembly 72 will move ice in one flow direction FD (toward the top of Fig. 3) and auger assembly 74 will move the ice in an opposite flow direction FD. The auger assembly 76 will move the ice

toward the ice chipper assembly 42 in the flow direction FD shown. The main purpose of the multiple ice augers is to maintain the flow of ice from the top of the ice hopper 70 continuously toward the bottom of the ice hopper 70 and ultimately to the ice chipper 42 so appropriate portioning of the ice can be achieved. In addition, the multiple ice augers maintain the ice in hopper 70 level for more even flow. Without multiple augers, it is possible for the ice to jam at the top of the ice hopper 70 and leave air pockets where no ice is present. By utilizing multiple augers, the ice is continually broken up and allowed to flow toward the bottom of the hopper 70 and toward the ice chipper assembly 42.

While any suitable conventional motor(s) may be used to drive the auger sprocket 40 and the chipper sprocket 52, a preferred embodiment of the present invention is configured such that a single drive motor 150 (Fig. 8) rotates all drive mechanisms. The details of this single drive motor design are discussed below.

With reference to Figs. 1 and 4, the foodstuffs storage area 28 is shown. The storage compartment location 28 comprises a plurality of pairs of slots 80 (Fig. 1) formed in the side walls of a refrigerated cabinet and horizontally disposed relative to one another for receiving a plurality of trays 82 (Fig. 4) used to support foodstuffs storage containers (not shown in Figs. 1 and 2). The trays 82 have opposed edges 84 which ride inside slots 80 so that the trays 82 can be slid into and retracted from the refrigerated cabinet of the storage compartment location area 28. At the bottom of each tray 82 is a central aperture 86 through which an access spout 134 (Fig. 6) from a foodstuffs storage container extends. Sloped walls 88 ensure that the liquid foodstuffs within the storage containers flows toward aperture 86 so that use of the foodstuffs held within the storage compartment containers is maximized.

Although not shown in the drawings, it will be understood by those skilled in the art that all standard refrigeration components, including without limitation a compressor, a thermostat, a run capacitor for the compressor motor, an evaporator, and a condenser, will be housed within the blending station apparatus 20 to cool the refrigerated cabinet corresponding to the foodstuffs storage compartment location 28.

One preferred embodiment includes six storage compartment trays 82 for holding six different types of foodstuffs storage containers. Those skilled in the art will understand, however, that the blending station apparatus 20 may be modified to include as many or as few storage compartment container racks or trays 82 as desired without departing from the scope of the present invention.

Foodstuffs from any one of the storage containers (none shown in Figs. 1 and 2) are propelled toward the blending container 25 by a plurality of associated peristaltic pumps 90, as shown in Figs. 5 and 6. The peristaltic pump 90 comprises a first pump housing half 92 and a second pump housing half 94. As can be seen, the first housing half 92 and the second housing half 94 are identical mating halves with respect to each other. This facilitates manufacturing of the pump housing and reduces manufacturing costs. The two pump housing halves 92, 94 are made of a plastic material, and are preferably assembled by ultrasonic welding. A first sealed bearing or bushing 96 is inserted into a correspondingly sized aperture 97 formed in the second pump housing. A second bushing or bearing 98 is placed inside of a similarly corresponding cavity (not shown) in the first pump housing half 92. A shaft 100 and attached roller assembly 102 are mounted within the housing halves 92, 94 by positioning shaft 100 within the sealed bearings 96, 98. Thereafter, the pump housing halves 92, 94 assembly are secured together.

The roller assembly 102 more specifically comprises a first roller 104 and a second roller 106, oppositely mounted with respect to roller 104. The shaft 100 is selectively engaged by a clutch 146 and associated gear 144 (Fig. 7), which causes the roller assembly 102 to rotate. Details of the pump drive mechanisms are explained below. Upon feeding an appropriately sized food grade elastomeric tube 140 into the inlet port 110 of the pump 90, the tube 140 is engaged by one of the rollers 104, 106, and rotated around the peripheral interior of the pump housing until the end of the tube 140 is adjacent to the outlet aperture 112. A flange 114 (Fig. 5) catches the end of the tube 140 and directs the tube to the exterior of outlet aperture 112 of the pump 90.

The pump assembly 92 further comprises opposed interlocking flanges 118 extending from a raised bushing area 119, the combination of which is configured to nest inside of one of the recesses 120 (Fig. 1) formed in a wall 122 of the refrigerated cabinet of the blending station apparatus 20. Each recess 120 includes notches 121 which correspond to the flanges 118 formed in the pump housing so that each of the pumps 90 nest inside recesses 120 to prevent rotation of the pumps 90 relative to wall 122 when in operation.

Fig. 6 shows more specifically the operation of the peristaltic pump 90. A supply of foodstuffs 130 is held within a collapsible storage bag 132 placed inside of the slidable support tray 82. Rather than a diluted beverage mix, the foodstuffs 130 preferably comprises chilled concentrate to which ice and/or water is added to create a beverage with an improved consistency at the time the beverage is served. The collapsible storage bag 132 is taken from the bag-in-the-box technology typically associated with carbonated beverages, except the box has been removed. Accordingly, the bag or container 132 is flexible and will collapse as foodstuffs 130 is removed from the interior of the container 132. Those skilled in the art will understand that, while a preferred embodiment of the present invention discloses a peristaltic pump for introducing

foodstuffs into the blending container 25, other suitable pumps and delivery systems may be utilized without departing from the scope of the present invention.

The storage container includes a conventional bag-in-a-box outlet end 134 through which the foodstuffs passes. The storage container is positioned inside the storage tray 82 such that the outlet end 134 of the storage bag 132 extends through aperture 86 formed in the tray 82. A supply tube 136 is operatively coupled to the storage bag 132 by a novel clasp mechanism 138, which appropriately seals with outlet end 132 when installed, yet allows for a quick disconnect of the storage bag 132 when it needs to be replaced. The clasp 138 is preferably made of synthetic material so all hinges have a memory to return the structure to its unstressed condition (as shown in Fig. 6) when the clasp is released. Those skilled in the art will understand that other suitable clasps or clips may be used to operatively connect the supply tube 136 with the storage bag 132 without departing from the scope of the present invention.

A replaceable tube section 140 is coupled to the supply tube 136 by a union member 142 which includes male extensions or barbed ends which extend into and seal with the respective ends of tubes 136, 140. As shown in Fig. 9, the roller assembly rotates to sequentially compress the tube 140 and its inner contents to create peristaltic action which draws foodstuffs 130 from the storage container 132 (Fig. 6). Tube 140 has an outlet end 141 which ultimately leads to a supply tube fitting 184 (also shown in Fig. 9) for automatically supplying the foodstuffs 130 to the blending container 25 when selected to prepare a desired beverage.

A unique aspect of the present invention is that the tube section 140 is easily replaced when worn or otherwise ready for removal. With reference to Figs. 8 and 9, a worn out tube 140 is first removed from the pump assembly by disconnecting from the fitting 184 and union 142 and allowing the pump to operate. The roller assembly will move the tube 140 out of the pump

housing. Thereafter, a lead end of a replacement section of tube 140 is inserted into the inlet end 110 until one of the rollers 104, 106 engages the lead end of the replacement section of tube 140, which is then drawn or walked around the entire roller assembly 102 and inside the inner periphery of the pump housing. To prevent the new tube 140 from winding around a second time onto itself, and to ensure that the lead end passes through outlet opening 112, the guide flange 114 (see Fig. 8) is provided to catch the lead end of the tube 140 and direct the tube through outlet end 112 of the pump 90. It should be noted that a second flange 116 (Fig. 5) is provided, but such a flange is included only to make the two parts identical, mating parts for ease of manufacturing purposes. The self-feeding feature of present invention greatly speeds the time required to change tube 140, and thus reduces the down time of the blending station apparatus.

Another novel aspect of the present invention relates to the assembly and quick disconnect feature of each of the drive mechanisms for the pumps 90. Each pump assembly comprises a unique single-pin securing system used to couple the pump 92 to the wall 122 of the blending station apparatus 20. As shown in Fig. 7, each pump shaft 100 includes an extended distal end 101 which extends through wall 122 of the refrigerated cabinet and receives a gear 144 followed by a clutch 146 to selectively engage the lugs or cogs 145 on the gear 144 depending upon the beverage selected to be made by the blending station apparatus. The clutch mechanism 146 is a small electric clutch and is similar to the type of clutches used for conventional photocopy machines. Any type of suitable electric clutch may be used for clutch assembly 146. Lead wires 147 operatively couple the clutch assembly 146 with a power source and an information processor associated with the blending station apparatus.

To secure the entire pump 90, gear 144, and clutch 146 to the wall 122 of the refrigerated cabinet, an aperture 124 is provided on the distal end 101 of the pump shaft 100. A single pin 148

is removably inserted into aperture 124 to secure all pump, gear sprocket, and clutch components in an operable condition relative to one another at the particular location on wall 122. The single-pin connection allows the pumps, as well as the gears and clutches, to be easily and quickly removed, replaced, and/or serviced.

Fig. 8 shows the details of the various drive mechanisms associated with the blending station apparatus of the present invention. More specifically, an electric motor 150 includes a drive shaft 152 to which a first drive sprocket 154, a second drive sprocket 156, and a third drive sprocket 158 are attached. The first drive sprocket 154 is operatively coupled to a sprocket 161 on a jack shaft 160 by a first chain 162. The second drive sprocket 156 is operatively coupled to the auger sprocket 40 (see Fig. 2) by a second drive chain 164. The third drive sprocket 158 is operatively coupled to the ice chipper drive sprocket 52 (see Fig. 2) by a third drive chain 166. Given the differences in diameter of the auger drive sprocket 40 as compared to the ice chipper drive sprocket 52 (as shown in Fig. 2), the motor 150 will rotate the two shafts at different speeds, as desired.

With reference to Figs. 7 and 8, the drive mechanisms associated with the pump are shown. A primary drive gear 170 (Fig. 7) is coupled to the jack shaft 160 by means of a connection pin 172. Jack shaft sprocket 161 and drive chain 162 (Fig. 8) operatively couple the jack shaft with the motor 150. The drive gear 170 will always rotate whenever the motor is in operation. The primary drive gear 170 operatively engages adjacent pump drive gears 144 which act as idlers until clutched (when selected according to the beverage ordered) by clutches 146 to rotate the respective shafts 100 of the pump mechanisms to drive the respective pumps 90 (Figs. 5 and 6) according to the beverage that is being prepared. Spacers or idlers 172 are provided between the pump drive gears 144 (only one shown in Fig. 12) because of the dimensions of pumps 90 (see

Fig. 4). The idlers 172 also cause the various gears 144 to rotate in the same direction. In a preferred embodiment, six peristaltic pumps 90 are driven by jack shaft 160. It will be understood by those skilled in the art, however, that additional peristaltic pumps could be driven by a single jack shaft or by additional jack shafts, as desired.

Fig. 9 shows the inlet line or tube array 180 which supplies one of the selected foodstuffs 130 (Fig. 6) from one of the plurality of holding trays 82 (Fig. 4) to the blending container or jar 25. The foodstuffs supply tube array 180 comprises a plurality of individual tubes 182 which have a plurality of inlet tube ends or openings 184 which are operatively connected to the tube section 140 (Fig. 6) utilized in connection with the various peristaltic pumps 90. Each of the tubes 182 in the tube array 180 begin at wall 122 (Figs. 1 and 6) and extend upward and through the main horizontal shelf 27, which separates the refrigerated cabinet and the upper processing location 24 and cleaning location 26. Above the shelf 27, the tube array 180 extends above the container 25 at input area 186 for dispensing selected foodstuffs into the open end of blending container 25 placed in the processing area 24. Depending on which type of beverage is ordered, one or more of the plurality of tubes 182 will be utilized to direct drink mix or foodstuffs to the container 25 for blending or processing. A water line 176 (Figs. 4 and 8) also introduces water directly into the blending container 25 upon demand by a suitable solenoid valve.

Figs. 10-13 show a configuration of combined insulation and duct work assembly 188 intended to be mounted over the tube array 180 (Figs. 8 and 9) and the inlet area 186 above the level of the main shelf 27. The assembly 188 creates a plenum for drawing air from and returning air to the refrigerated cabinet associated foodstuffs storage location. It is to be understood that Figs. 10-13 show open areas of the recirculating refrigeration system duct (*e.g.*, a panel has been removed so that the fan 190 is visible in Figs. 10 and 11). An insulated panel is intended to cover

the area where the fan 190 is shown in Figs. 10 and 11 to create the plenum. Those skilled in the art will understand that the configuration of the recirculating refrigeration system duct 188 is intended to accommodate a specific embodiment relative to the present invention, and that any other desired configuration and shape may be utilized without departing from the scope of the present invention.

Below the shelf level 27, the tubes 182 are exposed to refrigerated air from the refrigerated cabinet where the storage area 28 is designed to hold the various trays 82 (Fig. 1) which hold the containers of foodstuffs. The refrigerated cabinet maintains the foodstuffs, both in the storage containers and in the tubes, at a temperature that will be acceptable from a food storage standpoint. Above the main, horizontal shelf 27 (Fig. 9), however, the tube array 180 is no longer held within the refrigerated cabinet. Thus, the insulation and duct work assembly 188 allows air from the refrigerated cabinet area to flow around the tube array which extends above shelf 27. As noted in Figs. 10-13, a circulation fan 190 circulates the refrigerated air from the cabinet associated with the foodstuffs storage location (Fig. 2) so that it surrounds and maintains cool the tube array 180 and so that a more consistent refrigeration temperature is maintained.

Fig. 9 also shows the jar cleaning area 26, which forms a part of the present invention. A grate 192 will cover a sloped bottom surface 194 of the cleaning area 26 during operation. A drain channel 196 extends from the processing area 24 to allow all spillage and other liquid resulting from blending or processing to drain into the cleaning area 26. The bottom surface 194 of the cleaning area 26 slopes toward a drain 198 which is, in turn, operatively coupled to a drain external to the blending station apparatus. An inlet aperture 200 is provided at the bottom wall 194 of the cleaning area 24 for directing pressurized hot water into a jar 25 turned upside down for cleaning. A sensor switch 202 is actuated upon placing a dirty jar 25 into the cleaning area 26.

Thereafter, a solenoid valve (not shown) is actuated to allow pressurized hot water to rinse the inside of the jar 25 for an appropriate amount of time.

Fig. 9 further shows a additional foodstuffs supply storage area 210 and corresponding shoot or passageway 212 disposed directly above the blending container 212. Here, dry-mix foodstuffs may be added to the blending container. Such dry-mix foodstuffs include, without limitation, all types of candy mix-ins, dietary supplements, and the like. Multiple such dry-mix foodstuffs storage and supply devices may be operatively coupled to the blending station apparatus as desired.

In operation, when a particular beverage is desired, a blending container or jar 25 is placed inside of the processing area 24. A drink is ordered by entering the appropriate data and other information (*e.g.*, drink size and flavor) into the touch pad 210, which is operatively coupled to a suitable internal data processing device. Alternatively, the blending station apparatus 20 may be operatively coupled to a cash register or other data input device used for taking beverage orders. Once the beverage order is entered into the input device or cash register, the process for preparing the beverage may be automatically initiated.

Upon receipt of the input information, one or more of the various clutches 146 (Fig. 12) are automatically actuated to drive the respective pump(s) 90 for an appropriate amount of time to direct foodstuffs from the various storage containers held in trays 82 (Fig. 2) through the tube array 180 (Figs. 8 and 9) and into the mixing jar 25. An appropriate amount of chipped ice from the ice chipper 42 (Figs. 3 and 4) is automatically directed into the jar 25 as well as water from an inlet (not shown, but located above the blending container 25 when positioned inside the processing area 24) which supplies water to the interior of jar 25, according to the selected beverage. An additional novel aspect of the present invention is that a blending station apparatus

20 may be set up to measure the temperature of the water being introduced into the mixing container at water inlet 176 (Figs. 4 and 8), and the amount of ice that is introduced into the jar 25 will vary based upon the temperature of the water. This portioning of the ice allows the blending station apparatus 20 to achieve a desirable consistency of the beverage irrespective of the temperature of the water being introduced into the jar 25. For example, the water temperature in a relatively cold climate may be much lower than the water temperature at a relatively warmer climate. The blending station apparatus according to the present invention will measure the water temperature and portion the ice accordingly.

After the beverage ingredients have been added to the jar 25, a blending motor 168 is actuated to rotate a conventional blade rotatably secured inside the jar 25 to blend the contents within the jar 25. After appropriate blending has taken place, the contents of the jar are emptied into a beverage receptacle (not shown) for consumption. After the jar 25 has been used, it is inverted and placed within the cleaning area 26 (Figs. 1 and 9). Upon actuation of switch 202, the inlet 200 directs pressurized hot water into the interior of the jar for an appropriate amount of time to wash the jar 25. Waste water flows to the drain 198. The jar 25 is then ready for preparation of another beverage.

In compliance with the statute, the invention has been described in language more or less specific as to structural and methodical features. It is to be understood, however, that the invention is not limited to the specific features and methods shown and described, since the present description comprises preferred forms and methods of putting the invention into effect. The invention is, therefore, claimed in any of its forms or modifications with the proper scope of the appended claims appropriately interpreted in accordance with the doctrine of equivalents.

CLAIMS:

1. A blending station apparatus, comprising,

a blending container;

a blending location sized to receive the blending container;

a foodstuffs supply line carrying a foodstuffs, the foodstuffs supply line provided at the blending location to selectively and automatically introduce the foodstuffs into the blending container upon request;

a blending device mounted to the blending station apparatus at the blending location to blend the foodstuffs introduced into the blending container.

2. A blending station apparatus according to claim 1, further comprising an ice supply to directly and automatically introduce ice into the blending container upon request.

3. A blending station apparatus according to claim 1, further comprising:

an ice supply to selectively and automatically introduce ice into the blending container upon request;

a water supply to selectively and automatically introduce water into the blending container upon request.

4. A blending station apparatus according to claim 1 wherein the foodstuffs comprises a fruit flavored foodstuffs.

5. A blending station apparatus according to claim 1 wherein the foodstuffs comprises a nutritional supplement.

6. A blending station apparatus according to claim 1 wherein the foodstuffs comprises a coffee flavored foodstuffs.

7. A blending station apparatus according to claim 1, further comprising a refrigeration system to maintain the foodstuffs supply line refrigerated.

8. A blending station apparatus according to claim 1, further comprising:
a cleaning location sized to receive the blending container;
a cleaning liquid supply line provided at the cleaning location to automatically clean the blending container when placed within the cleaning location.

9. A blending station apparatus according to claim 1, further comprising at least two foodstuffs supply lines.

10. A blending station apparatus according to claim 1, further comprising six foodstuffs supply lines.

11. A blending station apparatus according to claim 1, further comprising a peristaltic pump operatively coupled to the foodstuffs supply line to directly and automatically introduce one or more of the foodstuffs into the blending container upon request.

12. A blending station apparatus according to claim 1, further comprising a control panel and an information processor operatively coupled to the control panel to input data into the blending station apparatus to automatically prepare a beverage .

13. A method of preparing a beverage at a single location, comprising:
providing a blending container;
providing a blending location sized to receive the blending container;
providing at least one foodstuffs supply line carrying a foodstuffs at the blending location;
providing a blending device mounted to the blending station apparatus at the blending location;
directly automatically introducing the foodstuffs into the blending container upon request;
blending the foodstuffs introduced into the blending container.

14. The method of claim 13 further comprising providing an ice supply at the blending location;
selectively and automatically introducing ice into the blending container upon request.

15. The method of claim 13 further comprising:

providing an ice supply at the blending location;

selectively and automatically introducing ice into the blending container upon request;

providing a water supply at the blending location;

selectively and automatically introducing water into the blending container upon request.

16. The method of claim 13 wherein the step of selectively and automatically introducing the foodstuffs into the blending container comprises introducing a fruit flavored foodstuffs.

17. The method of claim 13 wherein the step of selectively and automatically introducing the foodstuffs into the blending container comprises introducing a coffee flavored foodstuffs.

18. The method of claim 13 wherein the step of selectively and automatically introducing the foodstuffs into the blending container comprises introducing a nutritional supplement.

19. The method of claim 13, further comprising the step of maintaining the foodstuffs supply line refrigerated.

20. The method of claim 13, further comprising:
providing a cleaning location sized to receive the blending container;
providing a cleaning liquid supply line at the cleaning location;
placing the blending container within the cleaning location;
automatically cleaning the blending container after the blending container has been placed within the cleaning area.

21. The method of claim 13, further comprising:
providing a peristaltic pump operatively coupled to the foodstuffs supply line;
actuating the peristaltic pump to selectively and automatically introduce the foodstuffs into the blending container upon request.

22. The method of claim 13, further comprising providing two foodstuffs supply lines at the blending location.

23. The method of claim 13, further comprising providing six foodstuffs supply lines at the blending location.

24. A method of automatically preparing a beverage, comprising:
providing a plurality of beverage ingredients;
selecting two or more of the plurality of beverage ingredients for mixing together;
automatically and directly introducing the selected beverage ingredients into a blending container;
blending the selected beverage ingredients held within the blending container;
dispensing the blended ingredients into a beverage container for consumption.

25. The method of claim 24, further comprising:
placing the blending container within a cleaning location after the step of dispensing;
cleaning the blending container.

26. The method of claim 24, further comprising the step of selecting a size of the beverage to be made.

27. The method of claim 24 wherein the step of selecting two or more of the plurality of beverage ingredients for mixing together comprises selecting beverage ingredients from a group consisting of water, ice, and a plurality of fruit flavors.

28. The method of claim 24 wherein the step of selecting two or more of the beverage ingredients comprises selecting the two or more of the beverage ingredients from water, ice, and a plurality of coffee flavors.

29. The method of claim 24 wherein the step of selecting two or more of the plurality of beverage ingredients for mixing together comprises selecting the two or more beverage ingredients from a group of at least six foodstuffs supply sources.

30. A peristaltic pump for a beverage dispensing device, comprising:

a foodstuffs supply tube;

a peristaltic pump housing configured to receive the foodstuffs supply tube, the pump housing having an inlet and an outlet;

a roller assembly operatively coupled to the pump housing, the roller assembly sequentially engaging and compressing the supply tube to create peristaltic action and move foodstuffs through the foodstuffs supply tube.

31. A peristaltic pump for a beverage dispensing device according to claim 30, further comprising:

a guide flange formed in the pump housing, the guide flange configured to direct an end of the supply tube through the outlet of the pump.

32. A peristaltic pump for a beverage dispensing device according to claim 30 wherein the roller assembly comprises a pair of rollers spaced 180 degrees relative to one another.

33. A peristaltic pump for a beverage dispensing device according to claim 30 wherein the roller assembly is automatically actuated upon request.

34. A method of automatically preparing a beverage, comprising:

providing an ice supply;

providing a plurality of beverage ingredients;

selecting a drink size;

selecting a beverage ingredient;

automatically introducing a predetermined amount of ice and the beverage ingredient into a blending container based upon the selected drink size;

automatically blending the ice and the selected beverage ingredient in the blending container;

dispensing the beverage into a beverage container having the selected drink size.

35. The method of claim 34, further comprising:

placing the blending container into a cleaning location;

cleaning the blending container at the cleaning location.

36. The method of claim 34 wherein the beverage ingredients comprise a plurality of juice flavors.

37. The method of claim 34 wherein the beverage ingredients comprise a plurality of coffee flavors.

38. The method of claim 34 wherein the beverage ingredients comprise a plurality of sorbet flavors.

39. The method of claim 34 wherein the beverage ingredients comprise a plurality of yogurt flavors.

40. The method of claim 34 wherein the beverage ingredients comprise a plurality of sherbet flavors.

41. The method of claim 34 wherein the beverage ingredients comprise a plurality of ice cream flavors.

ABSTRACT OF THE INVENTION

A blending station apparatus and method includes a foodstuffs storage location where a plurality of individual foodstuffs storage containers are held, a control panel for inputting information into the blending station so that the beverage size and one or more of the various types of foodstuffs, as well as other ingredients such as ice, water, supplements, etc., can be selected to make a drink, a blending container to hold the various ingredients, a mixing location for blending the ingredients to achieve a uniform drink consistency, and a cleaning location to clean the blending container after the blended contents have been dispensed into a container for consumption.

31

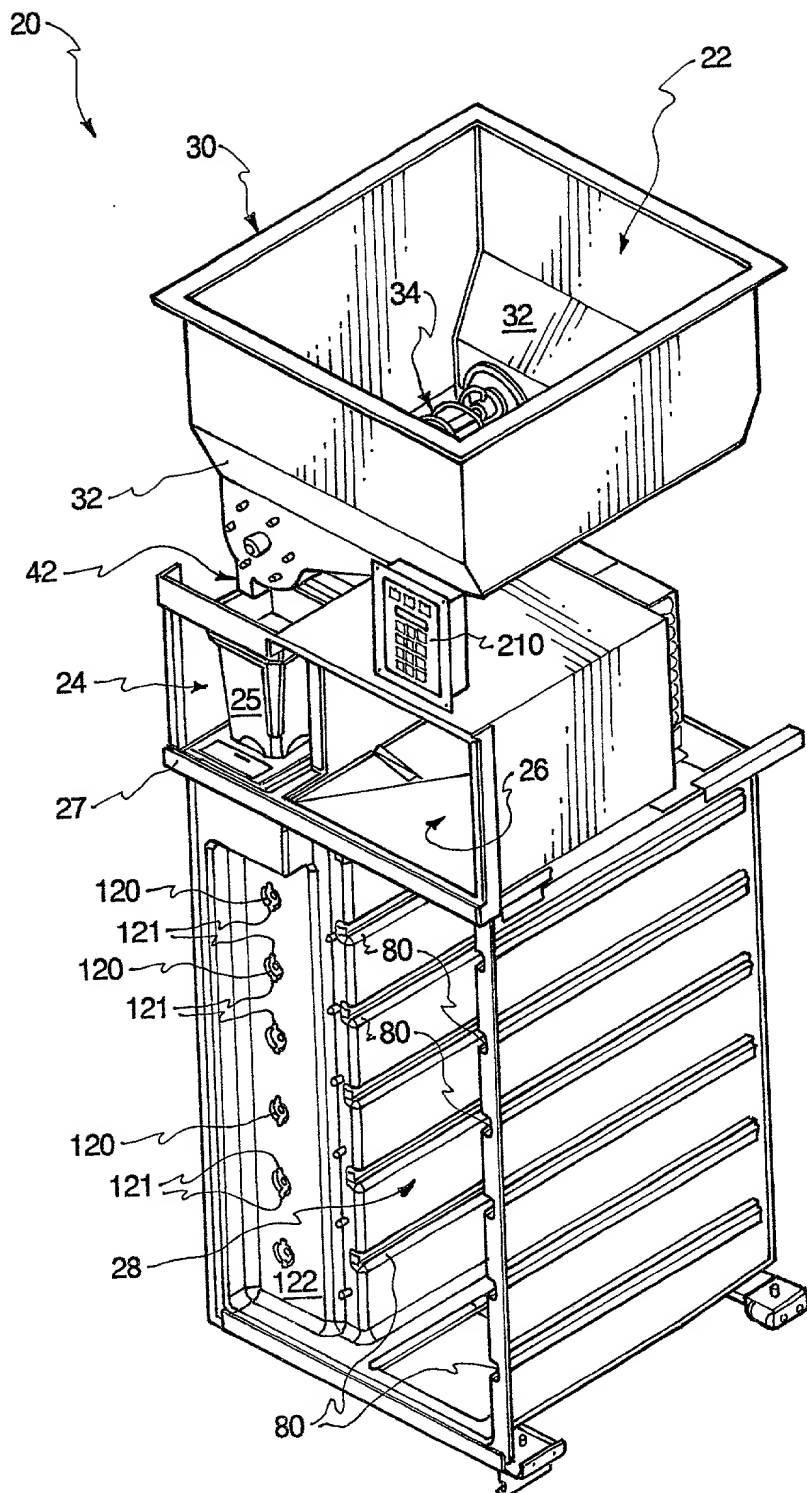


Fig.1

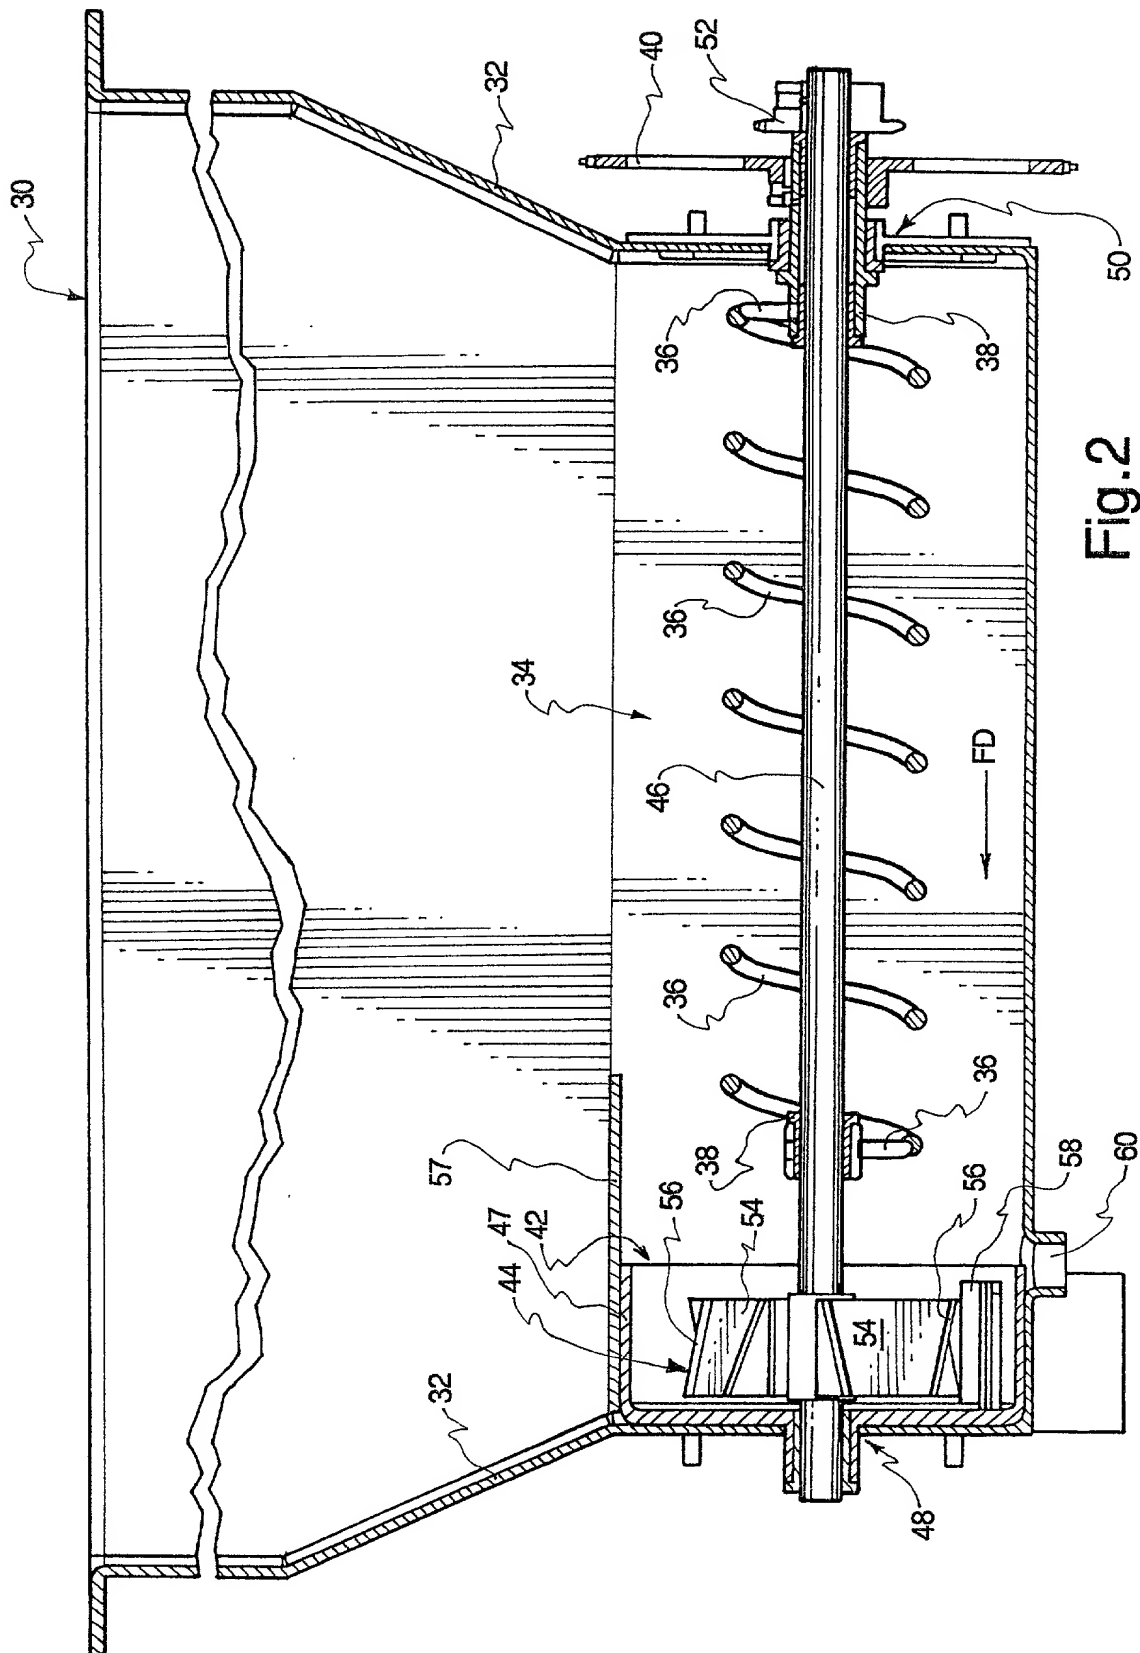


Fig. 2

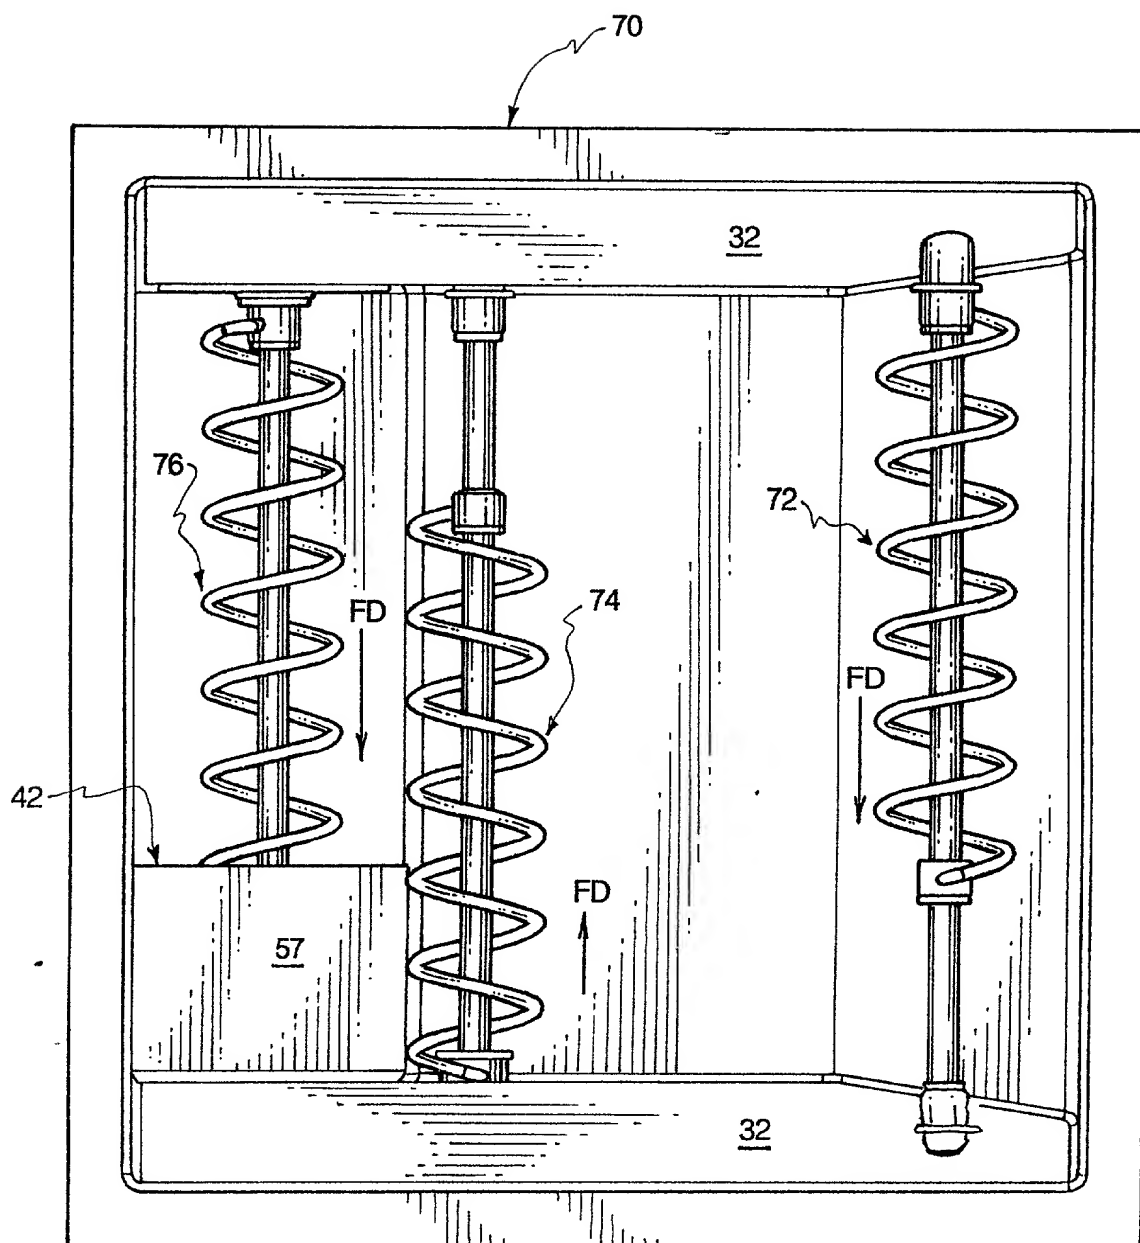


Fig.3

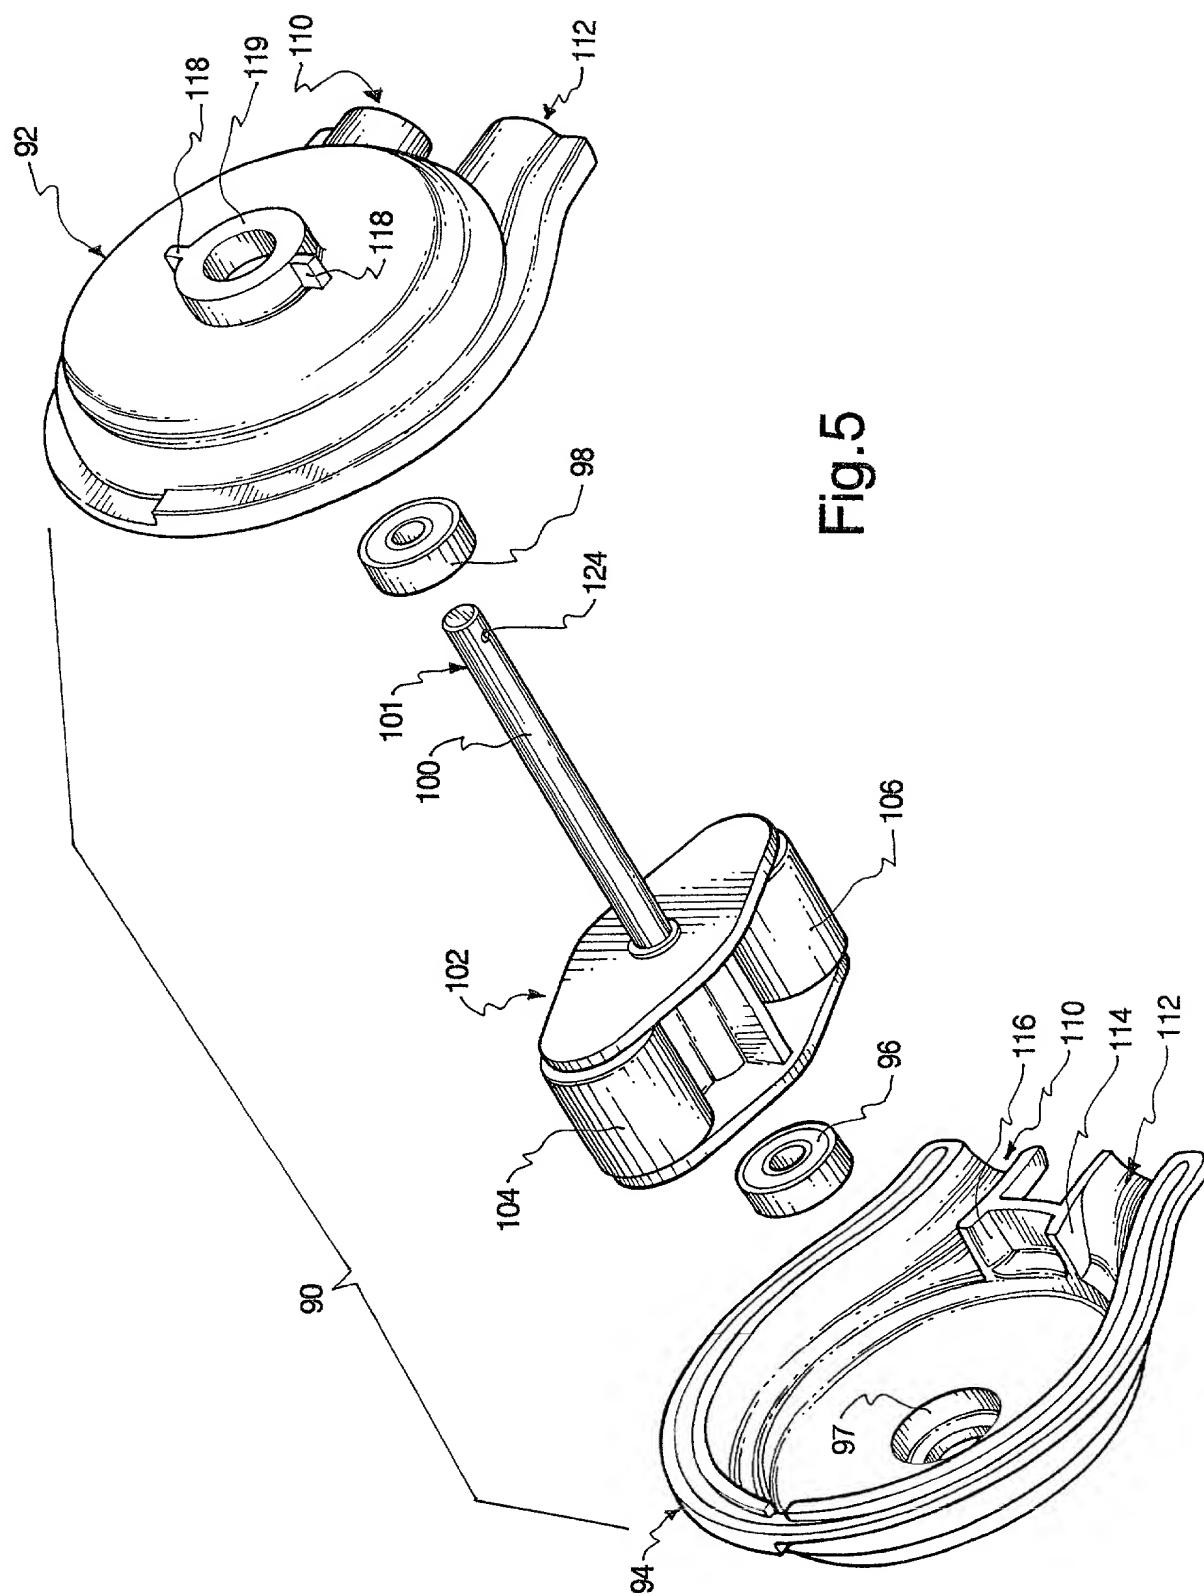
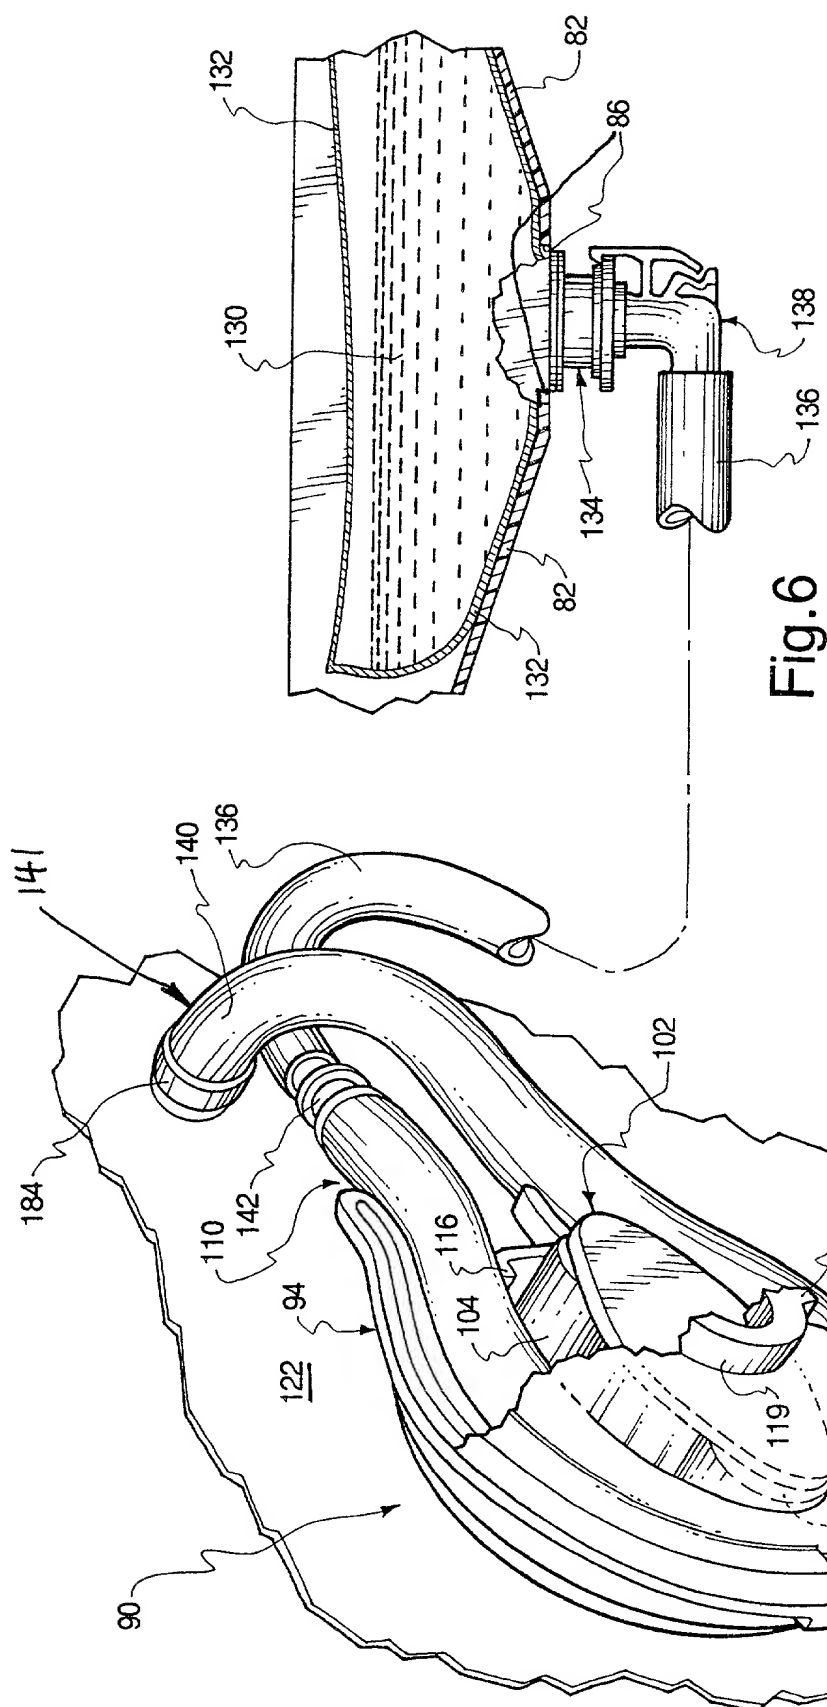


Fig. 5.



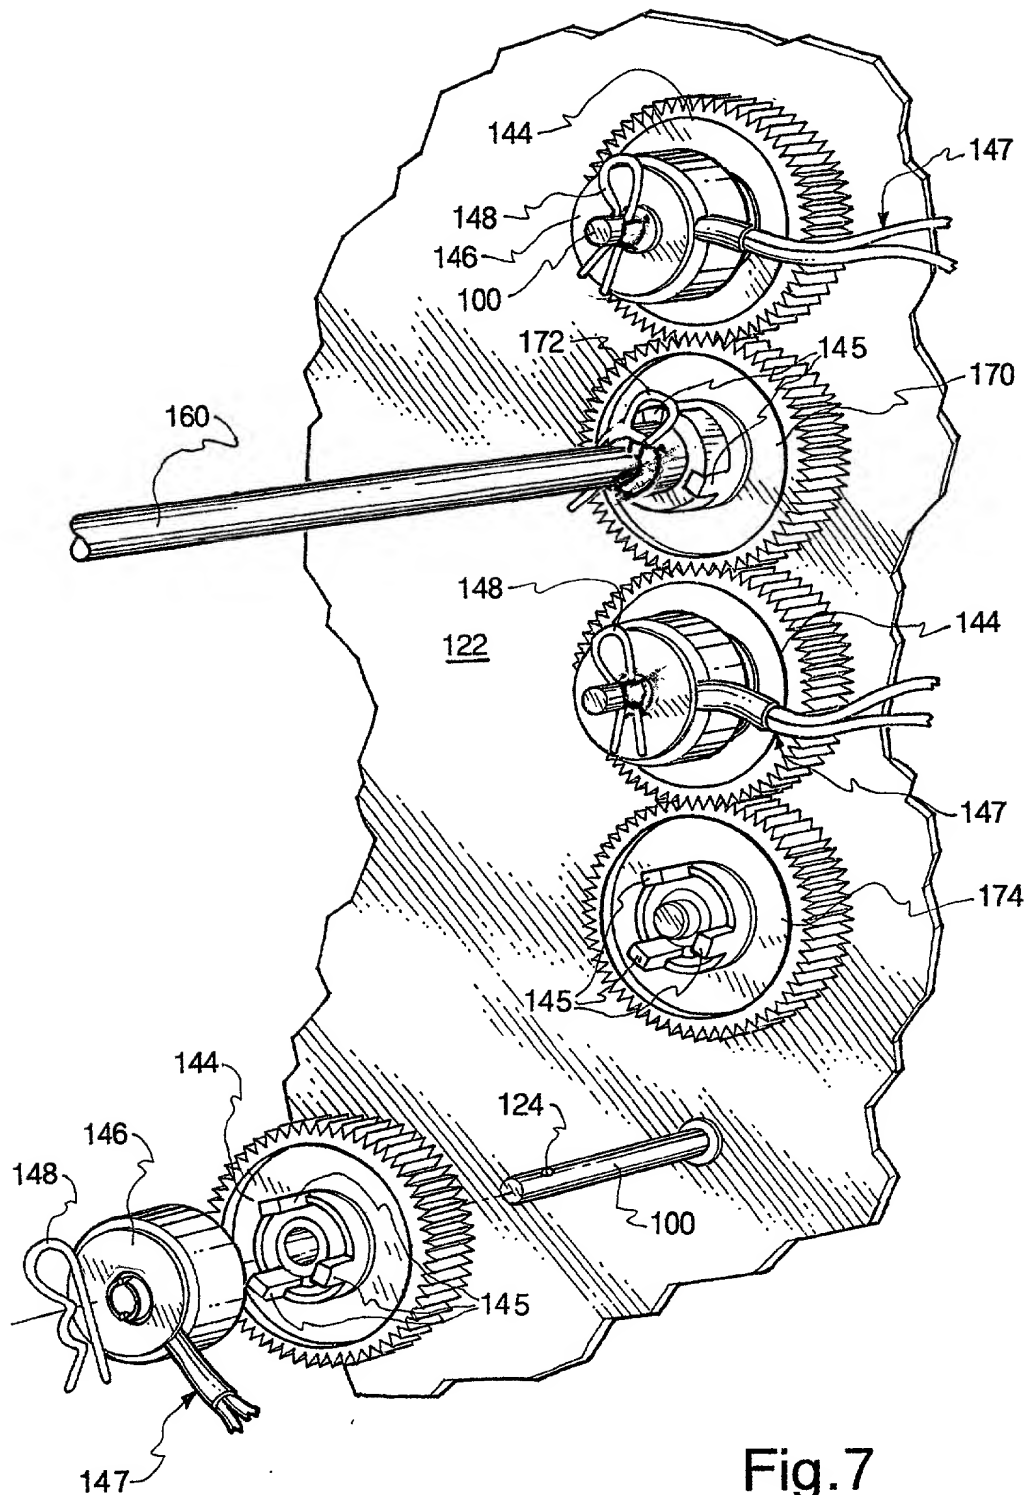


Fig.7






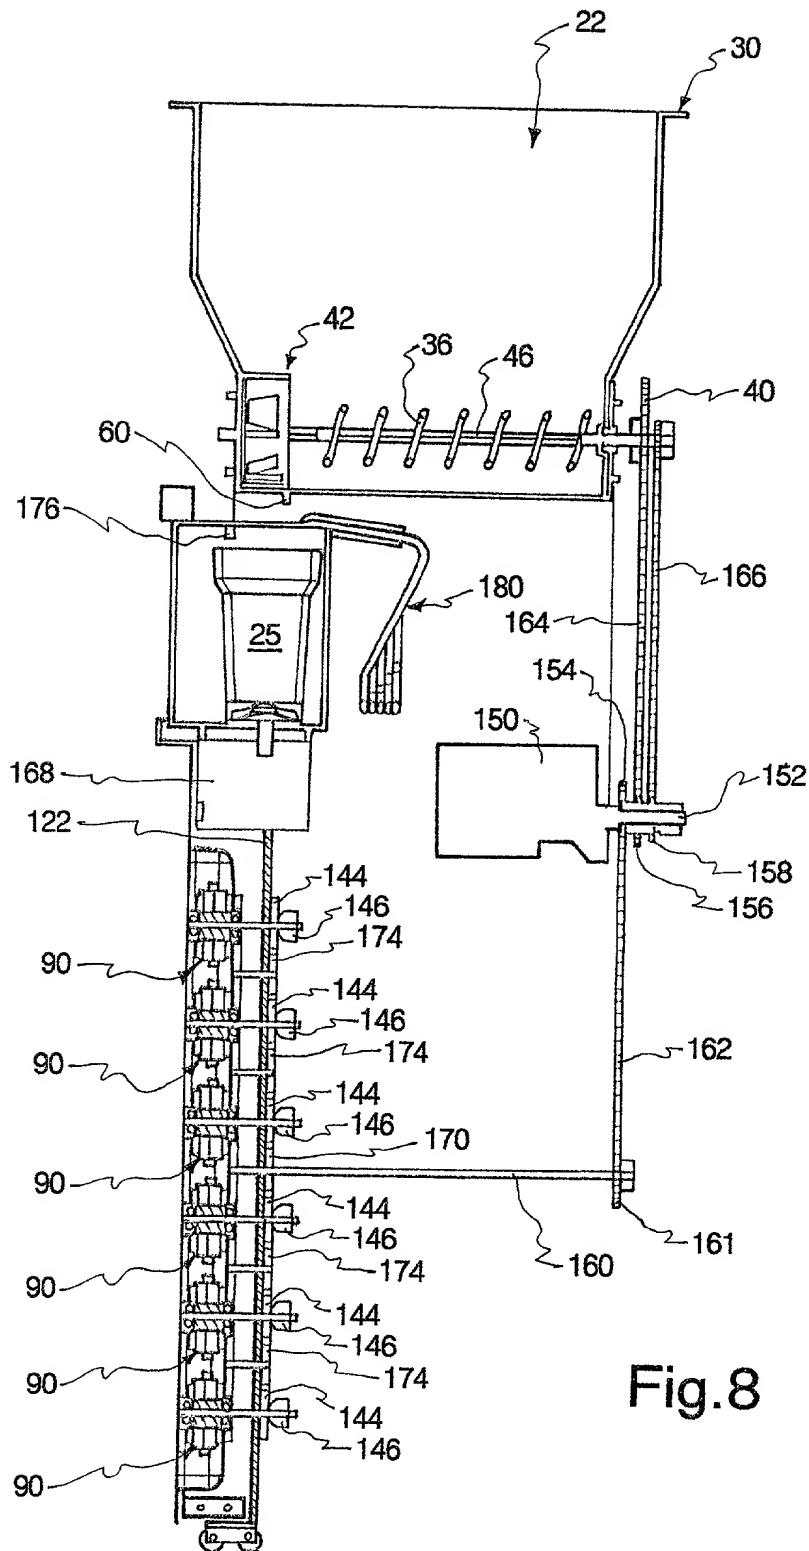


Fig.8

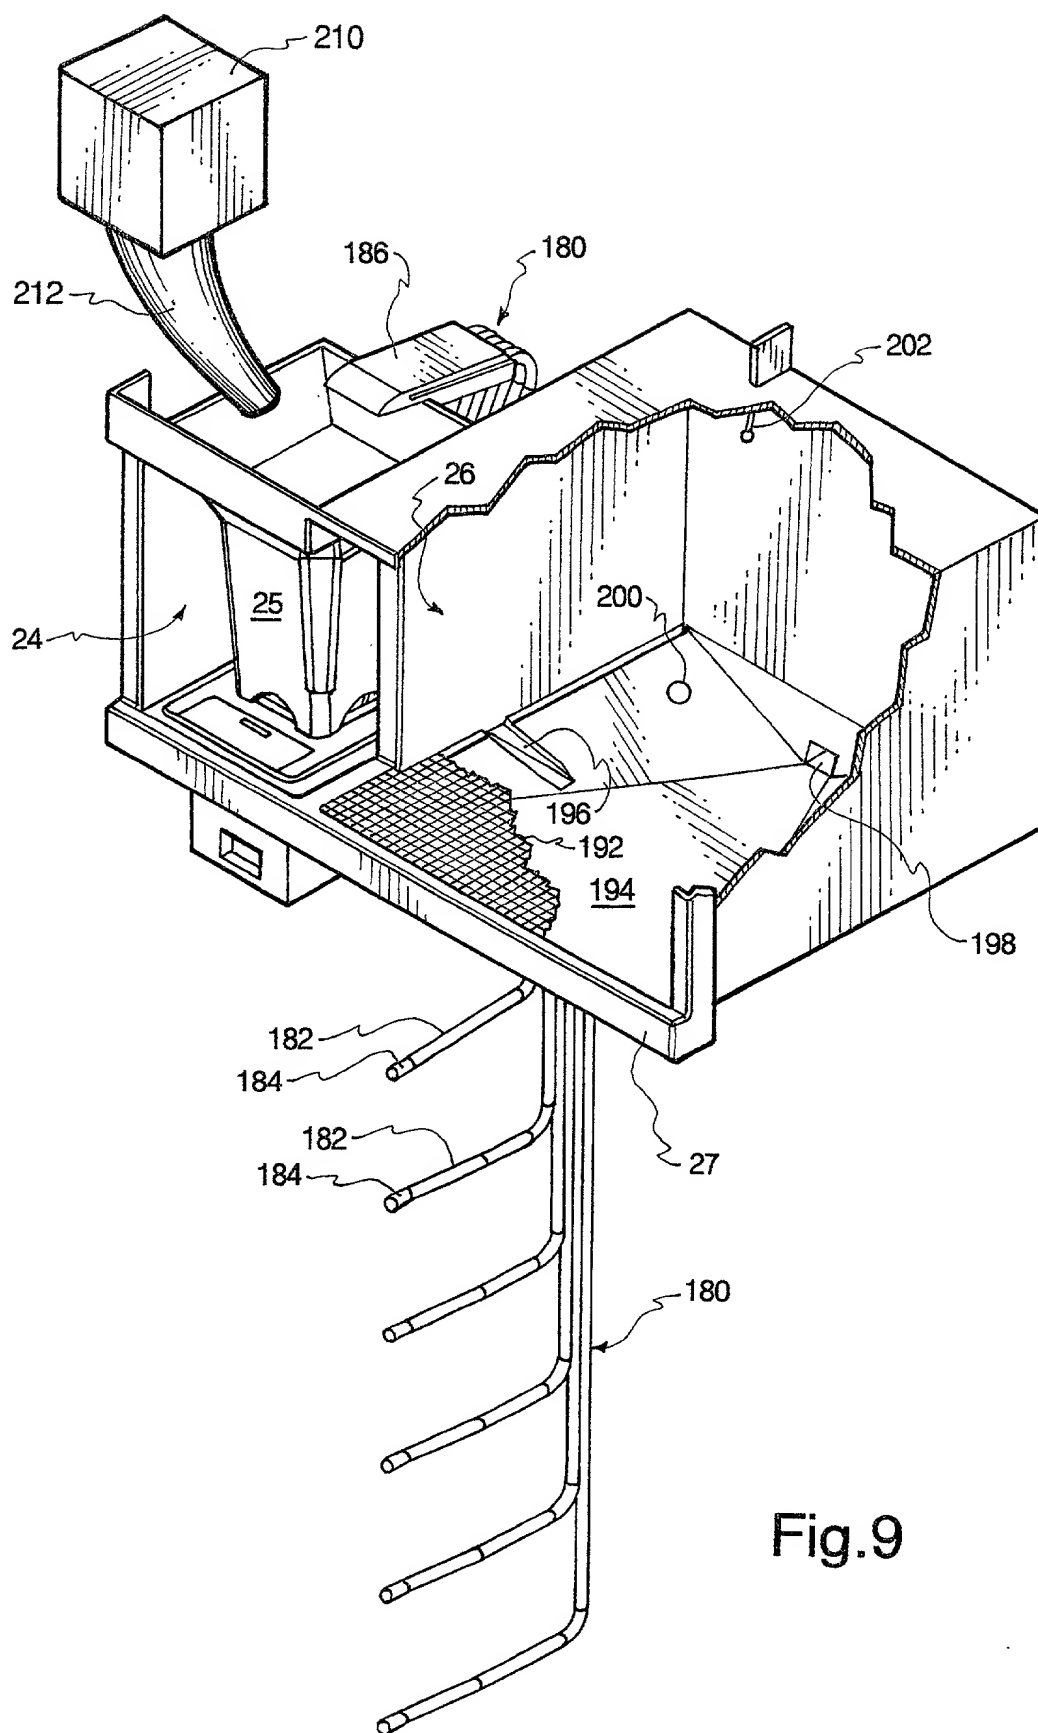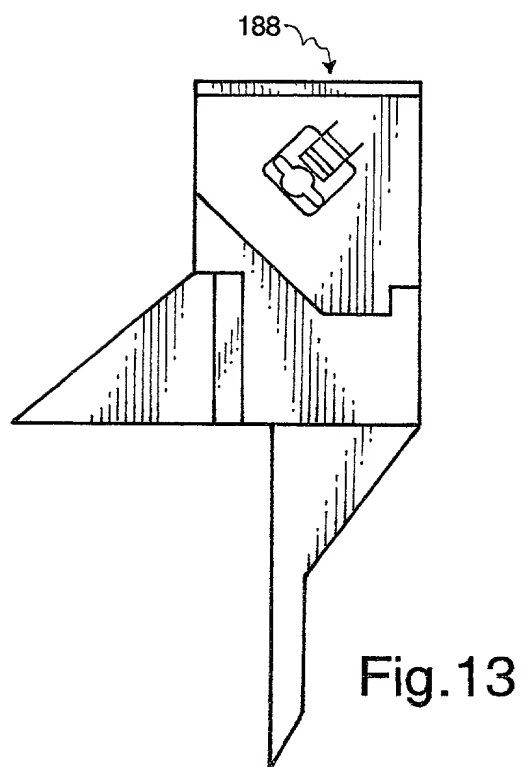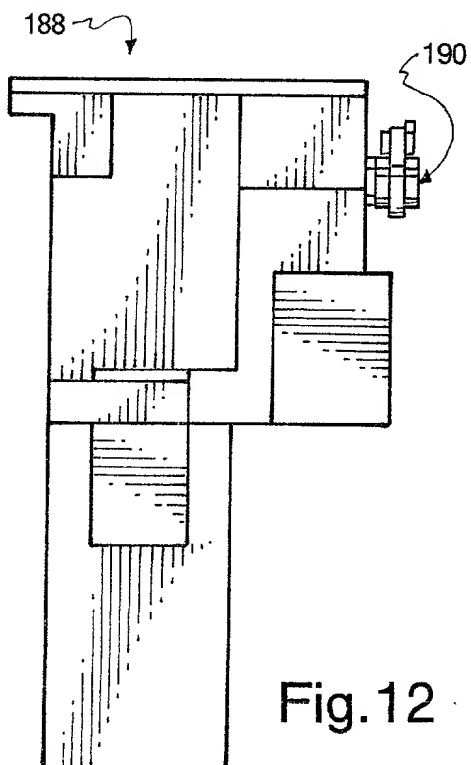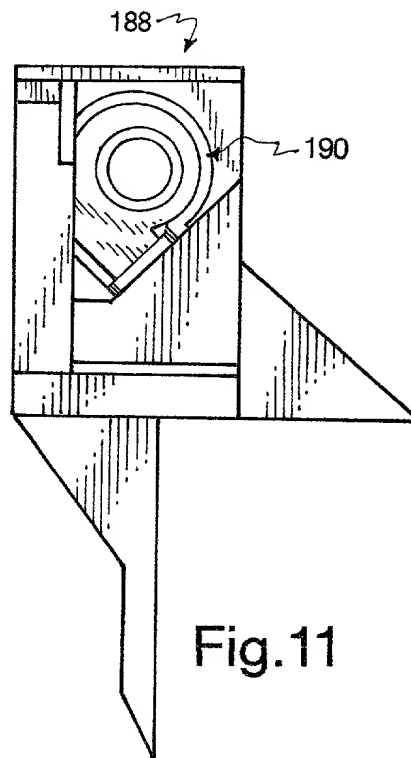

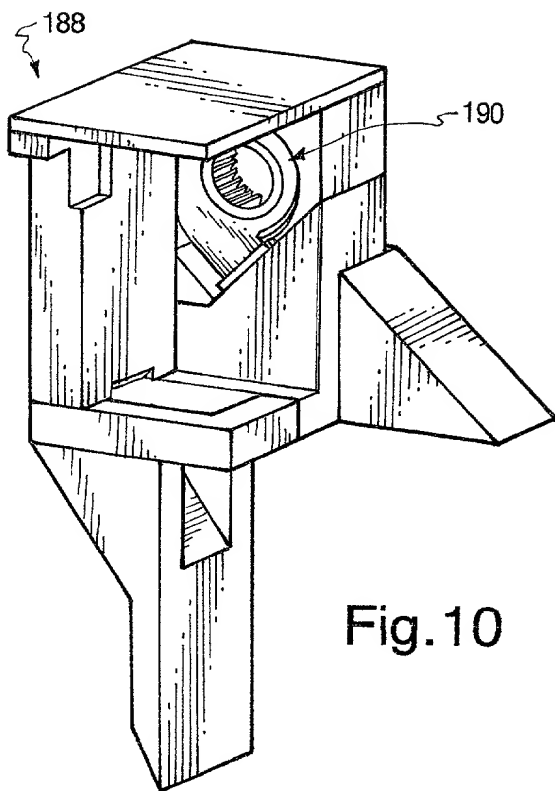

DECLARATION OF JOINT INVENTORS FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first, and joint inventor of the claimed subject matter for which a design patent is sought on the invention entitled "Blending Station Apparatus" described and shown in the specification.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information known to me to be material to patentability as defined in 37 C.F.R. §1.56.

PRIOR FOREIGN APPLICATIONS:

I hereby state that no applications for foreign patents or inventors certificates have been filed prior to the date of execution of this declaration.

POWER OF ATTORNEY:

I hereby appoint the firm of FOSTER & FOSTER L. L.C., located at 602 East 300 South, Salt Lake City, Utah 84102, telephone number (801) 364-5633 and facsimile number (801) 355-8938, comprising L. Grant Foster, Registration No. 33,236, Lynn G. Foster, Registration No. 21,189, and Robert S. Rapp, Registration No. 45,393, to prosecute this application and transact all business in the Patent and Trademark Office in connection therewith.

Address all telephone calls to L. Grant Foster at (801) 364-5633.

Address all correspondence to:

L. Grant Foster
FOSTER & FOSTER L.L.C.
602 East 300 South
Salt Lake City, Utah 84102

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued therefrom.

* * * * *

Full name of inventor: Thomas D. Dickson, Jr.

Inventor's Signature: _____

Date: _____

Residence: 10439 North Edinburgh Drive
Highland, Utah 84003

Citizenship: U.S.A.

* * * * *

Full name of inventor: B. Shawn Elgaen

Inventor's Signature: _____

Date: _____

Residence: 180 North 1080 East
Provo, Utah 84606

Citizenship: U.S.A.

* * * * *

Full name of inventor: Ralph W. Schwarze

Inventor's Signature: _____

Date: _____

Residence: 12468 Robleda Road
 Los Altos Hills, California 94022

Citizenship: U.S.A.

* * * * *

Full name of inventor: David J. Throckmorton

Inventor's Signature: _____

Date: _____

Residence: 10508 Aberdeen Lane
 Highland, Utah 84003

Citizenship: U.S.A.